

AN ISO 9001:2008
CERTIFIED COMPANY


24" X 24"

vitrified tiles 605 x 605 mm.

SIMECTM
VITRIFIED TILES

A PRODUCT FROM

SHREEJI
CERAMIC IND.

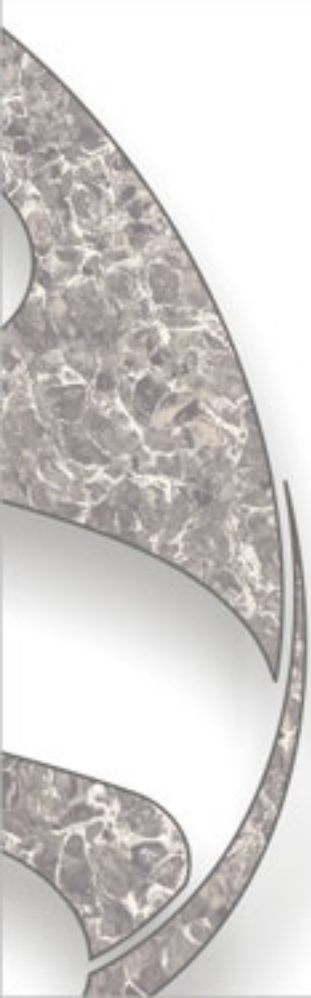

COMING
SOON

Double Charged

shreeji group present

Double Charged

Vitrified Tiles 605 x 605 mm.
800 x 800 mm. , 900 x 900 mm.

with **NANO⁺** Technology



1101




1102



1103



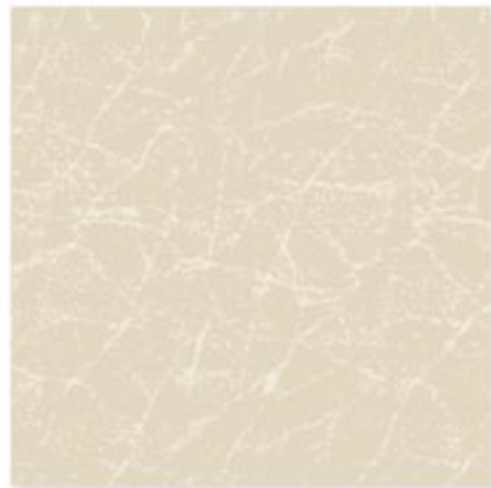

1104




1105



1107



1108

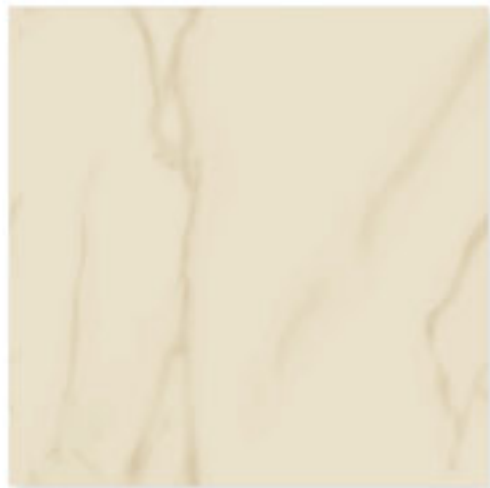

1111




1112



1113



1114

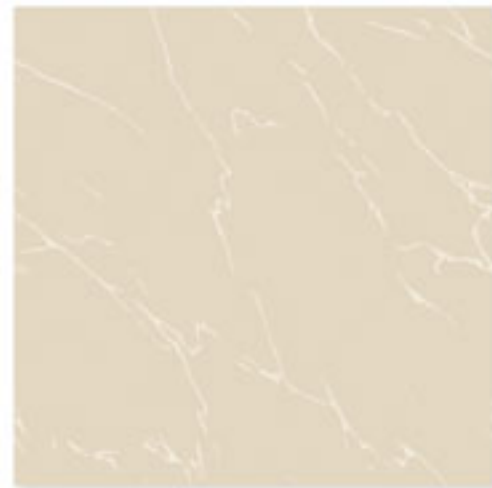

1115





1116



1117




1119



1120



1123

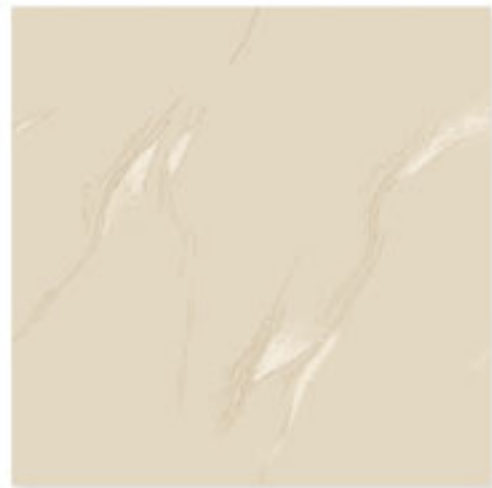

1124



1126



1127



1128






1129



1130



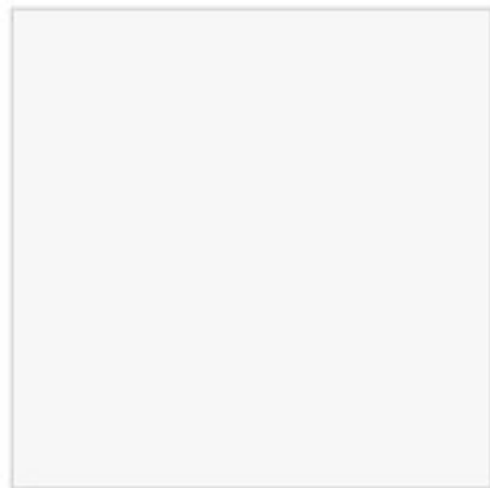

White



Black





Ivory



Terracotta



Jaisalmer

QUALITY STANDARD REFERENCE TABLE



No.	PROPERTY	International Std. ISO 13006/EN 178 Group B1a	SIMEC VITRIFIED VALUE	Method Of Testing
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 0.5%	± 0.1%	EN 98
3.	Straightness of Sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.2%	EN 98
6.	Water Absorption*	< 0.5%	< 0.05%	EN 99
7.	Mohs Hardness*	> 6	> 8	EN 101
8.	Flexural Straightness*	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 144 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength*	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost Resistance	Frost Proof	Frost Proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Colour Resistance	No Damage	No Damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistance	Resistance	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min 65% - 70% reflection	Glossmeter




APPLICATIONS



TILE LAYING INSTRUCTION

Kindly look for the arrow on the back of the tile and follow the laying patterns as shown beside.




Please note that the company does not accept any liability in case of problem arising out of non-adherence to the above fixing instructions.

PACKING DETAIL

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
605 x 605 mm.	9.5 mm.	4 pcs.	1.46 Sq. mt.	31 Kgs. (Approx.)

Note: Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.



SHREEJI[®] CERAMIC IND.

8-A, National Highway, Lalpar,
MORBI - 363 642. (Guj.) INDIA.

Ph. : +91-2822-241 499
Fax : +91-2822-242 294

e-mail : info@shreejicera.com
Join Us :   

www.shreejicera.com